
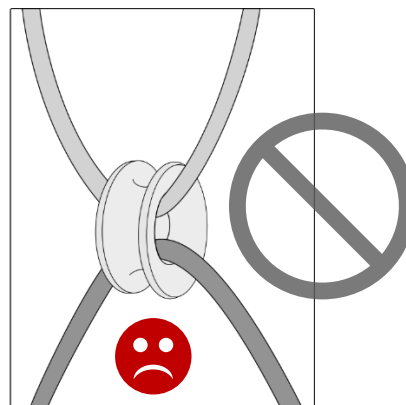
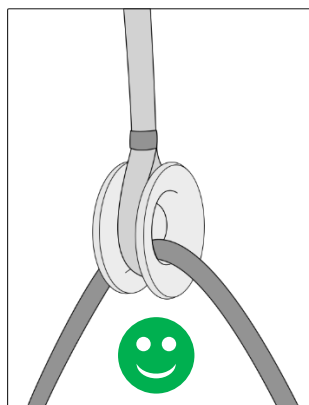
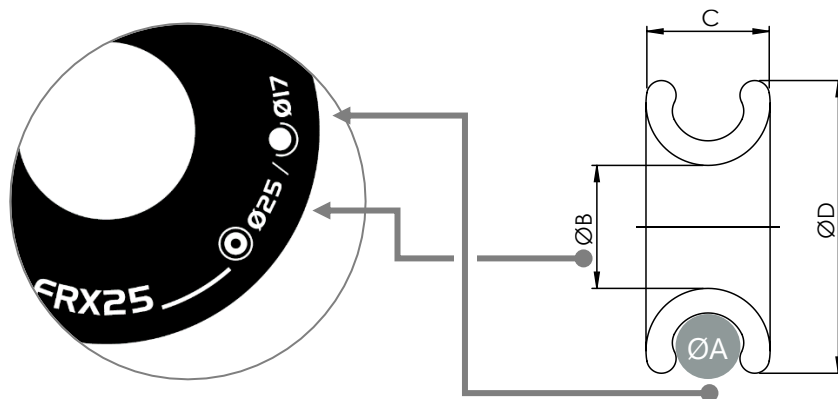


Ne pas utiliser pour des applications de levage ou tant qu'EPI / Not for lifting application or PPE

## Anneaux FRX / FRX friction rings

Applications : Pied de mât, barberhauler, inhauler, loop, cosses, lazy jack, palan, pataras.../ Mast-foot block, barber-hauler, inhauler, loop, thimble, lazy jack, running backstay, tackle...

Ref.	Designation	ØA mm	ØB mm	C mm	ØD mm	C.T W.L Kg	Poids Weight Kg	Matériau Material
20705	FRX6	5.5	7	9	18	400	0.002	Aluminium
21008	FRX10	8	10	12	25	800	0.005	Aluminium
21510	FRX15	10	15	15	35	1600	0.012	Aluminium
22014	FRX20	14	20	21	47	3200	0.031	Aluminium
22517	FRX25	17	25	25	60	5000	0.057	Aluminium
24027	FRX40	27	40	40	90	8000	0.213	Aluminium

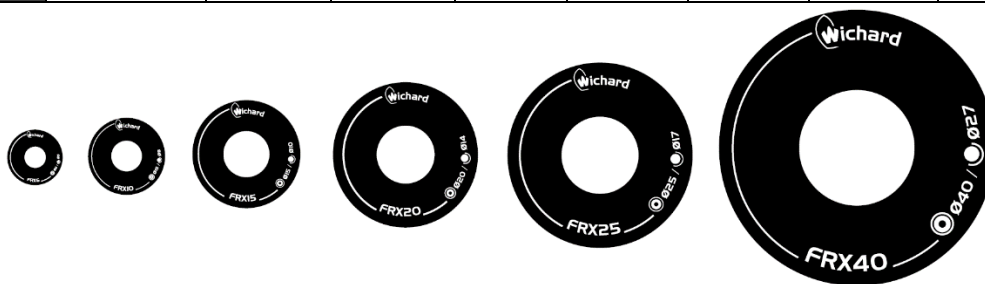

[www.wichard.com](http://www.wichard.com)